


Aqua Wholesale, Inc. is proud to offer the 3900 Series commercial water treatment system, incorporating the Pentair 3900 Series control valve with the highest service flow rate for a top mounted valve on the market today.

Maximizing the 3900's two hundred plus service flow rate, Aqua Wholesale applies its expertise in application and sizing to supply you with a customized water treatment system for almost any flow rate you may encounter.

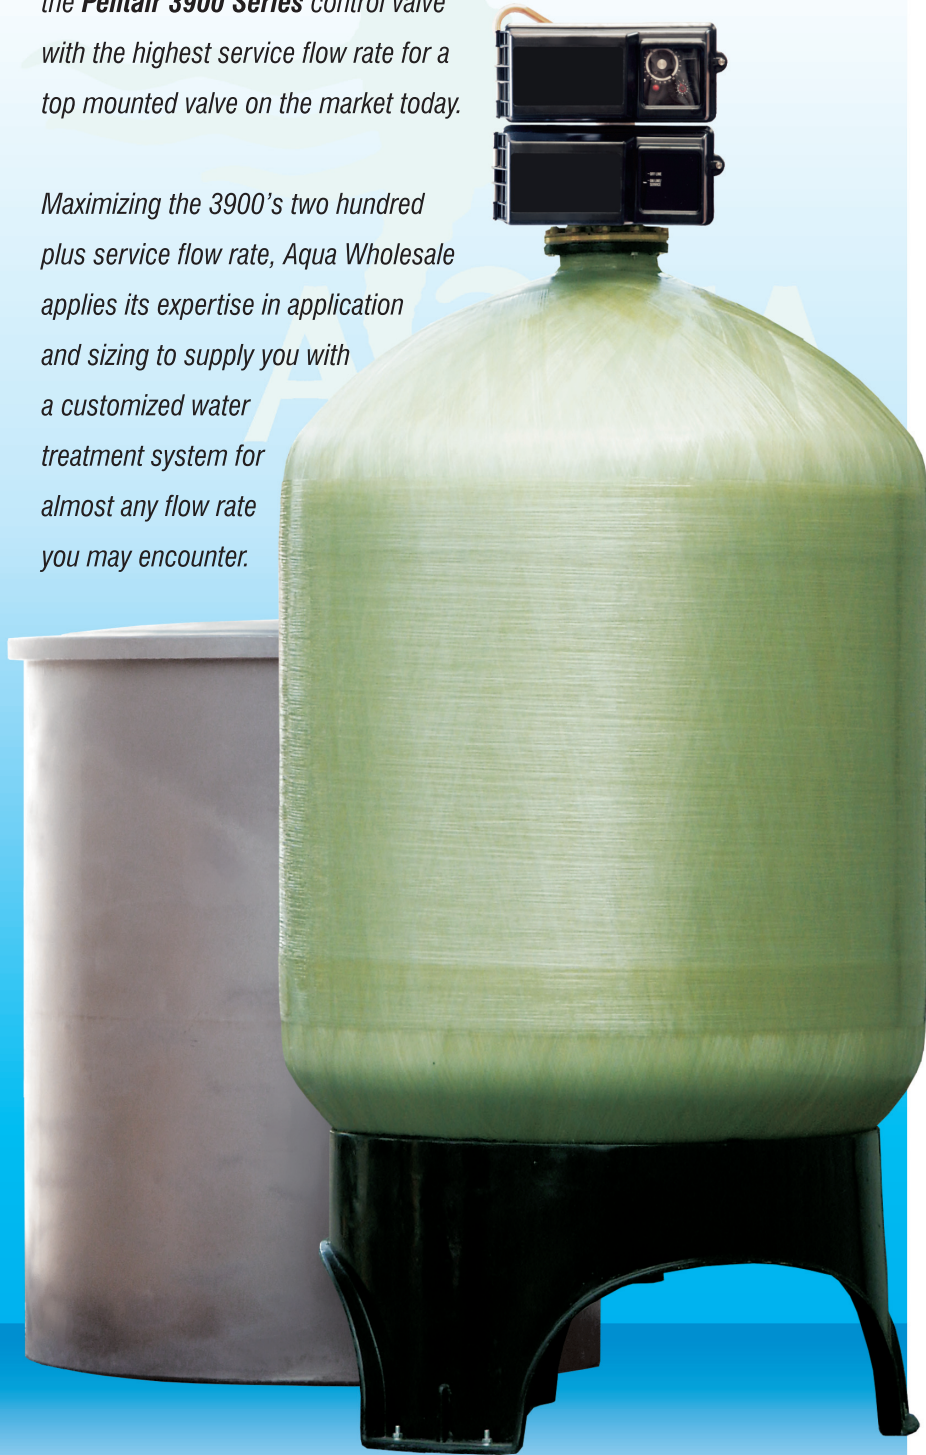

The 3900 Series Commercial Water Treatment Equipment

The dominating 200+ gpm service flow rate of the **3900** is channeled thru a robust 3" inlet/outlet brass valve body that houses two hydraulically balanced pistons which direct water through a stack of seals and spacers. This technology allows the 3900 valve to divert the water thru the valve body during all functions of regeneration, also provides the capability of an internal "no hard water bypass". This allows the 3900 to handle multiple tank softener or filter systems up to four tanks for conditioned service water 24 hours, 7 days a week.

Used as top mount or side mount, the 3900 also complements its high service flow rate by having either a mechanical 12 day and metered timer or an electronic "NT" timer assembly protected by a stainless steel back plate with a plastic, hinged nema 3 plastic timer cover. The mechanical 12 day & metered timers allow for total adjustability of all regeneration cycles, and mechanically count gallons of all conditioned service water. The electronic "NT" timer assembly allows for customization of your regeneration cycles, counts gallons, gives system diagnostics on performance and history, and an optional day override feature for regeneration. Both the mechanical and electronic "NT" timers have options to control various external devices such as solenoids, chemical feed pumps and reverse osmosis units. Both timers can also be wired (mechanical) or programmed ("NT") to control multiple regeneration possibilities such as series regeneration, lockout regeneration or alternating regeneration. The electronic "NT" timer also allows for a unique progressive flow option which gives you maximum efficiency of your systems capacity for those applications where the flow rates may fluctuate to extremes.

Having the powerful features of the 3900 combined with a composite fiberglass resin tank, high capacity softening resin or filter media, and heavy duty rotationally molded polyethylene brine tank, assures Aqua Wholesale the confidence that they can assist the water treatment professional in solving high flow rate water problems.

APPLICATIONS

- | | |
|-----------------------------|--------------------------|
| <i>Apartment Buildings</i> | <i>Condominiums</i> |
| <i>Car Wash</i> | <i>Office buildings</i> |
| <i>Laundromats</i> | <i>Boilers</i> |
| <i>Hospitals</i> | <i>Motels/Hotels</i> |
| <i>Restaurants</i> | <i>Factories</i> |
| <i>Farms</i> | <i>Schools</i> |
| <i>Commercial Buildings</i> | <i>Nursing/Rest Home</i> |
| <i>Mobile Home Parks</i> | |

Sales Office
6265 E. Sawgrass Rd.
Sarasota, FL 34240
www.aquawholesale.net



Tel [941] 341-0847
Tel [800] 591-1094
Fax [941] 341-0746
awi2001@verizon.net

